


1/2" FLEX  
CONDUIT  
3 FT LONG

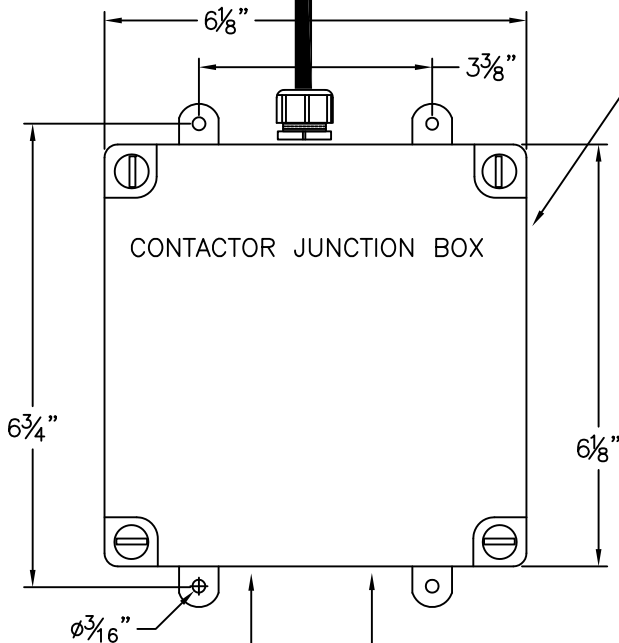

POWER TO CHILLER

POWER IN 220V 1PH

6X6X4 NEMA 4 PVC BOX

SPECIFICATIONS

INPUT VOLTAGE \_\_\_\_\_ 220 VAC 1PH, 50/60 HZ  
 TEMPERATURE RANGE \_\_\_\_\_ -30°F to 220°F  
 DIFFERENTIAL RANGE \_\_\_\_\_ 1°F to 30°F  
 SWITCH ACTION \_\_\_\_\_ DPST CONTACTOR  
 CONTROL AMBIENT TEMPERATURE  
 OPERATING \_\_\_\_\_ -27°F to 140°F (29°C to 60°C)  
 STORAGE \_\_\_\_\_ -40 to 176°F (-40°C to 80°C)  
 ENCLOSURE \_\_\_\_\_ NEMA TYPE 4X OUTDOOR

RELAY ELECTRICAL RATINGS

	NO CONTACTS	220V 1PH
FULL-LOAD AMPS.		30
LOCKED ROTOR AMPS.		180
HEATER RESISTIVE AMPS.	40 / 6 kW	
CHILLER HORSEPOWER		2 HP



Aqua Logic, Inc.  
9558 Camino Ruiz  
San Diego, CA. 92019

TITLE:  
ADC-6-220 CONTROLLER  
SPECIFICATIONS

LAST UPDATE: 7-20-06

DATE: 7-20-06

FILE: All Controls Spec

BY: CE