






# ALSLT-95 THRU 190-8 UV STERILIZERS



**POWER CORD  
PLUG TYPE**

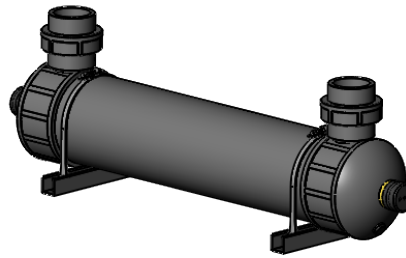

**115V 15 AMP  
#5-15P**

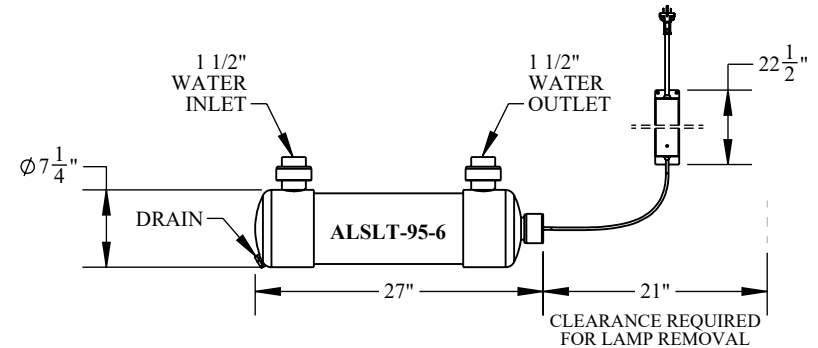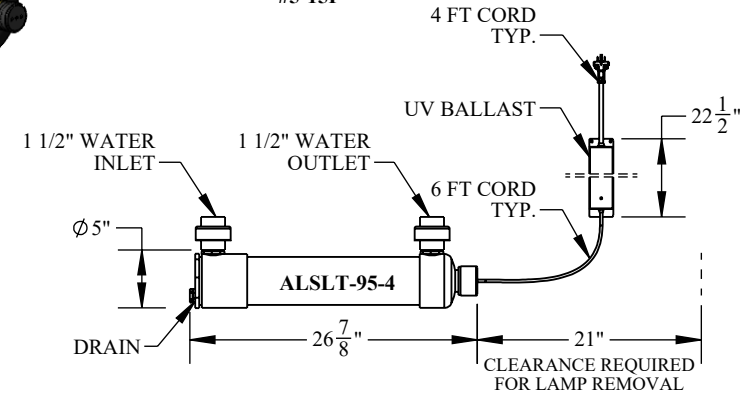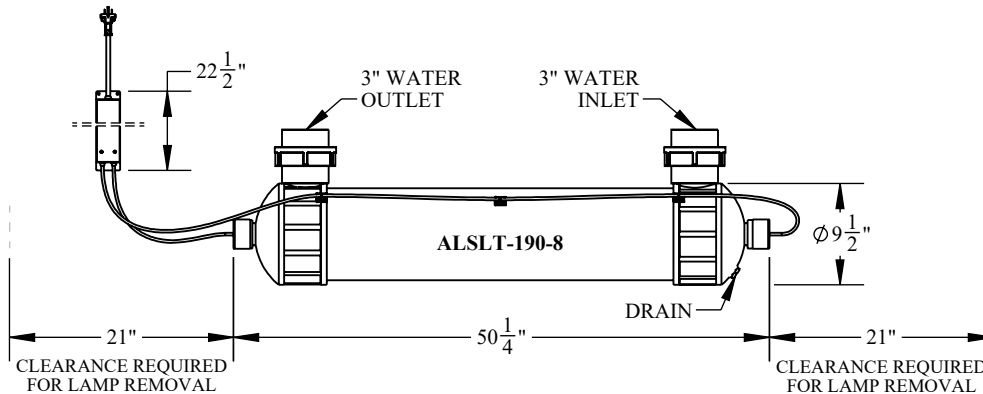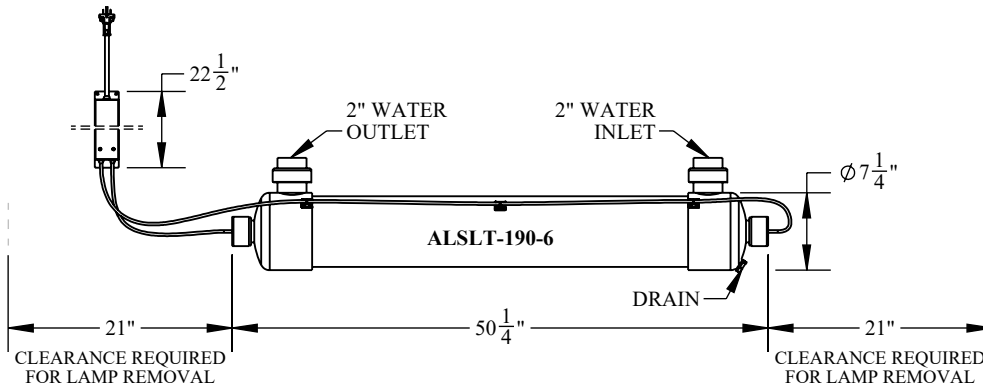

| ALSLT UV STERILIZER SPECIFICATIONS |              |       |              |                       |                                                                                                                    |     |     |     |      |                                               |
|------------------------------------|--------------|-------|--------------|-----------------------|--------------------------------------------------------------------------------------------------------------------|-----|-----|-----|------|-----------------------------------------------|
| MODEL NO.                          | LAMP / WATTS | VOLTS | AMPS / WATTS | *WATER INLET / OUTLET | MAXIMUM WATER FLOW RATE (GPM) AT UV INTENSITY $\mu\text{Wsec/cm}^2$ @ 90% TRANSMISSIBILITY 85% AT END OF LAMP LIFE |     |     |     |      | OPTIONAL FIBERGLASS MOUNTING BRACKET PART NO. |
|                                    |              |       |              |                       | 30K                                                                                                                | 45K | 60K | 90K | 120K |                                               |
| ALSLT-95-4                         | 1 / 95       | 115   | .9 / 104     | 1-1/2" FPT            | 25                                                                                                                 | 17  | 13  | 8   | 6    | UV-MB-4                                       |
| ALSLT-95-6                         | 1 / 95       | 115   | .9 / 104     | 1-1/2" UNION          | 35                                                                                                                 | 23  | 18  | 12  | 9    | UV-MB-6                                       |
| ALSLT-190-6                        | 2 / 190      | 115   | 1.8 / 207    | 2" UNION              | 70                                                                                                                 | 46  | 36  | 24  | 18   | UV-MB-6                                       |
| ALSLT-190-8                        | 2 / 190      | 115   | 1.8 / 207    | 3" UNION              | 110                                                                                                                | 73  | 55  | 36  | 28   | UV-MB-8                                       |

## NOTE:

- SHADED AREAS HAVE WATER VELOCITIES GREATER THAN 5FT / SEC.
- ALL DIMENSIONS ARE APPROXIMATE AND CAN CHANGE AT ANY TIME.
- MAXIMUM WORKING PRESSURE FOR ALL UNITS IS 35 PSI.

## OPTIONAL:

FIBERGLASS MOUNTING BRACKET (SEE TABLE FOR PART NUMBER).

**REPLACE UV LAMP EVERY 11 MONTHS**

**REPLACEMENT UV LAMP PART#: UV-BULB-095W-1**

**aqua**  
LOGIC  
Water & Air Conditioning Systems

9558 Camino Ruiz, San Diego, CA 92126

DRAWING #  
PDF-0062

SHEET TITLE  
**ALSLT-95 THRU 190-8  
UV STERILIZERS**

\* COPYRIGHT \*  
These drawings including design idea and construction techniques herein are the sole property of Aqua Logic Inc. They shall not be revised, copied, or reproduced in any manner without the written consent of Aqua Logic Inc.

## DESCRIPTION

AQUA LOGIC ULTRAVIOLET STERILIZERS

DRAWN BY  
Arnaldo Guzman

DATE  
1/27/2023

REVISION

SCALE  
SHEET #  
1 OF 1