


DS-3 THRU DS-6 SPECIFICATION SHEET

FOR INDOOR FRESH AND SALT WATER APPLICATIONS

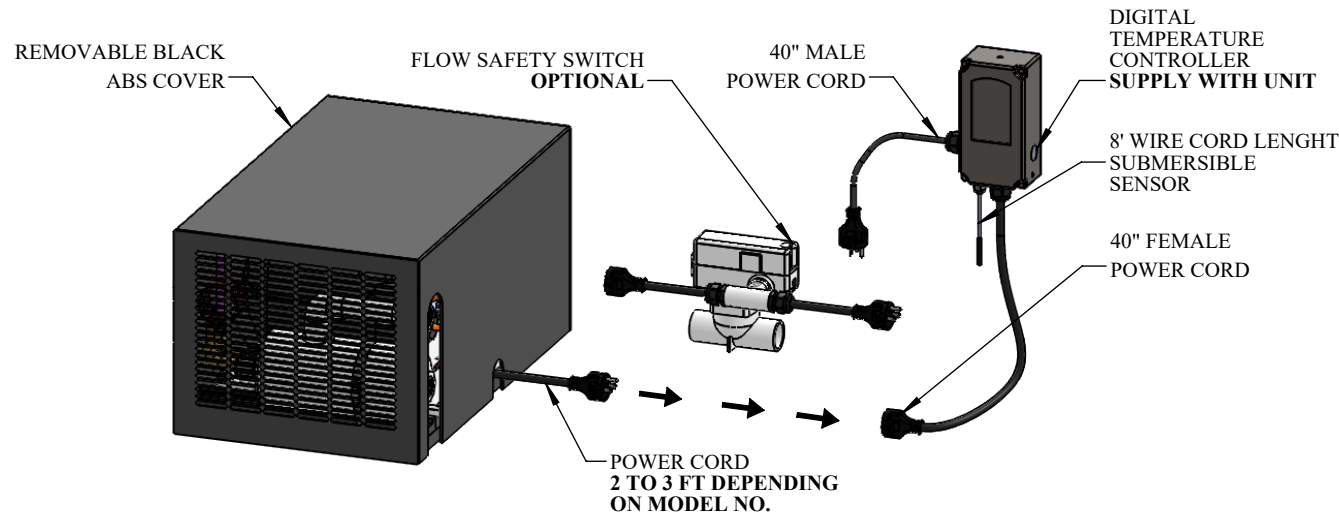


CHILLER	DIGITAL TEMP. CONTROL	OPTIONAL FLOW SAFETY SWITCH
DS-3	TR115SN	FS-1
DS-4	TR115SN	FS-1
DS-5	TR115SN	FS-1.5-15
DS-6	TR230SN	FS-1.5-230


OPTIONS:

- ADD "CWCT" (COLD WATER CAP TUBE) TO MODEL NUMBER FOR WATER TEMPERATURES BETWEEN 50-65°F.
- ADD "TXV" (THERMAL EXPANSION VALVE) TO THE MODEL NUMBER FOR WATER TEMPERATURES BETWEEN 40-80°F.

DS-5 AND DS-6

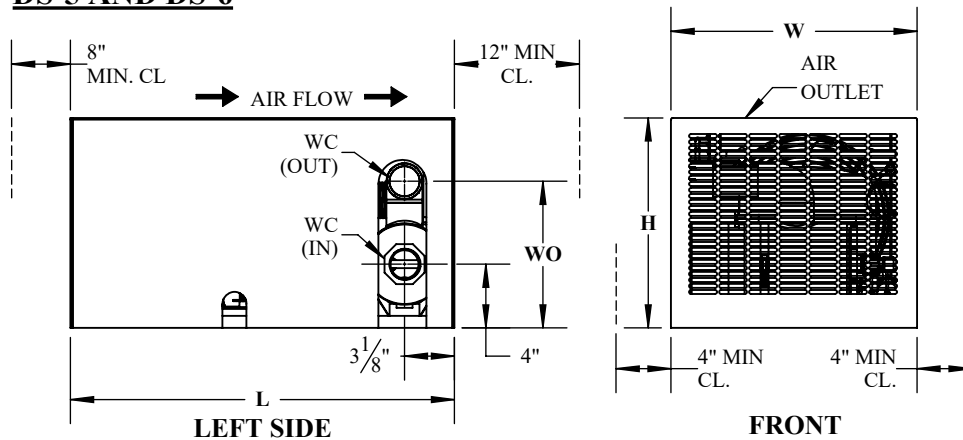

DS-3 AND DS-4

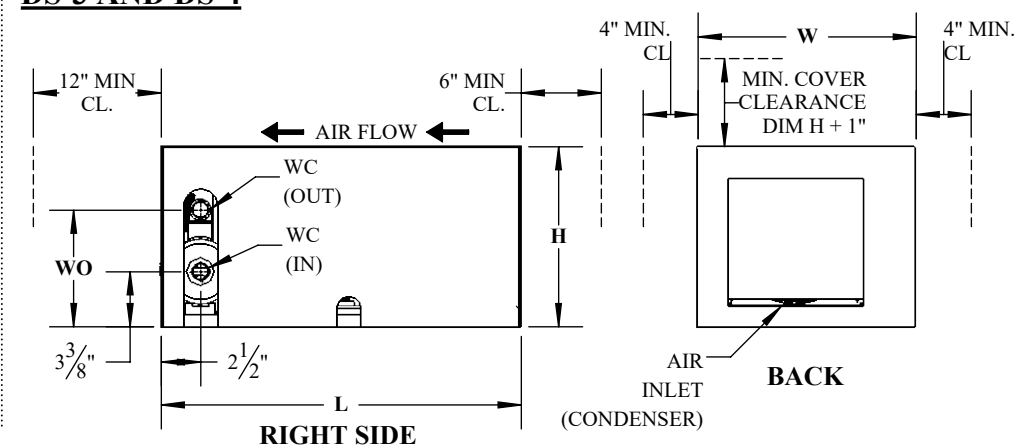

WO: WATER OUTLET WC: WATER CONNECTION SIZE CL: CLEARANCE

CHILLER SPECIFICATIONS												
MODEL NO.	HP	NOMINAL BTUH	R134A REFRIGERANT CHARGE (OZ.)	VOLTS / PHASE	AMPS.	WATTS	WATER FLOW RATE (GPM)	AIR OUTPUT (CFM)	L	W	H	WC WATER IN / OUT (FPT)
DS-3	1/4	3,000	5	115	5.4	621	8-15	240	22 1/2"	13 5/8"	11 1/4"	7 1/4"
DS-4	1/3	4,000	8	115	7.2	828	10-20	260	22 1/2"	13 5/8"	11 1/4"	7 1/4"
DS-5	1/2	6,000	12	115	9.5	1092	12-25	350	24"	15 3/8"	13 1/8"	9 1/4"
DS-6	1/2	6,000	12	230 / 1	4.8	1104	12-25	350	24"	15 3/8"	13 1/8"	9 1/4"

NOTE:

- STANDARD MODEL CHILLERS OPERATE WITHIN A TEMPERATURE RANGE OF 65-80°F.
- ALL DIMENSIONS ARE APPROXIMATE AND CAN CHANGE WITHOUT NOTICE.

POWER CORD PLUG TYPE



#5-15P
DS-3 THRU DS-5



#6-15P
DS-6



9558 Camino Ruiz, San Diego, CA 92126

* COPYRIGHT *				DESCRIPTION			
These drawings including design idea and construction techniques herein are the sole property of Aqua Logic Inc. They shall not be revised, copied, or reproduced in any manner without the written consent of Aqua Logic Inc..				DELTA STAR AIR COOLED WATER CHILLERS			
DRAWN BY	DATE	REVISION	SCALE	SHEET #			
A. GUZMAN	8/15/2022	DANFOSS		1 OF 1			

DRAWING #	SHEET TITLE
	DS-3 THRU DS-6 CHILLER SPECIFICATION