

ALSLT-95 THRU 190-8 UV STERILIZERS





POWER CORD PLUG TYPE

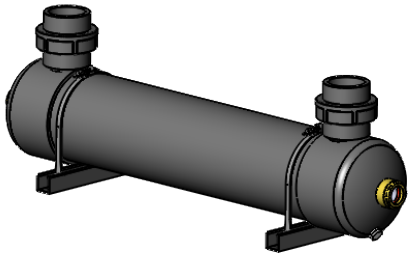


115V 15 AMP #5-15P

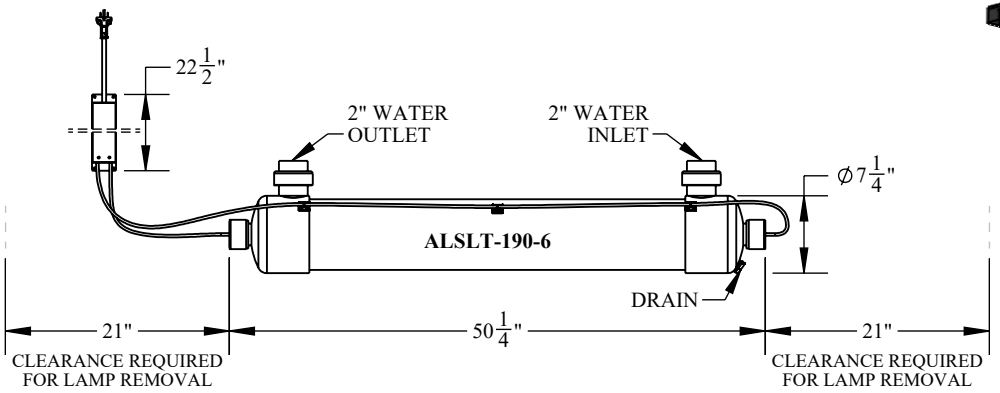

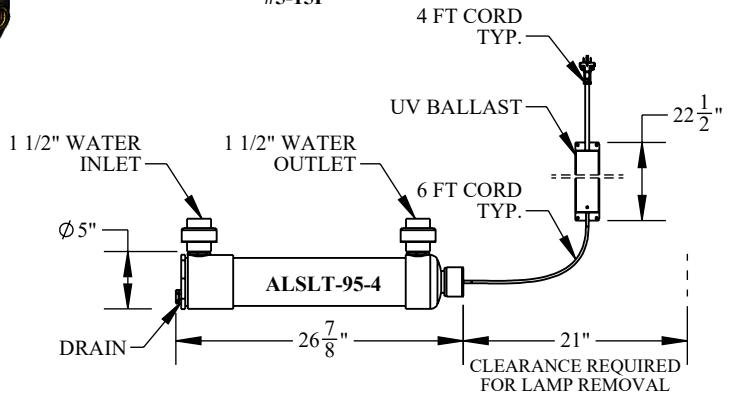

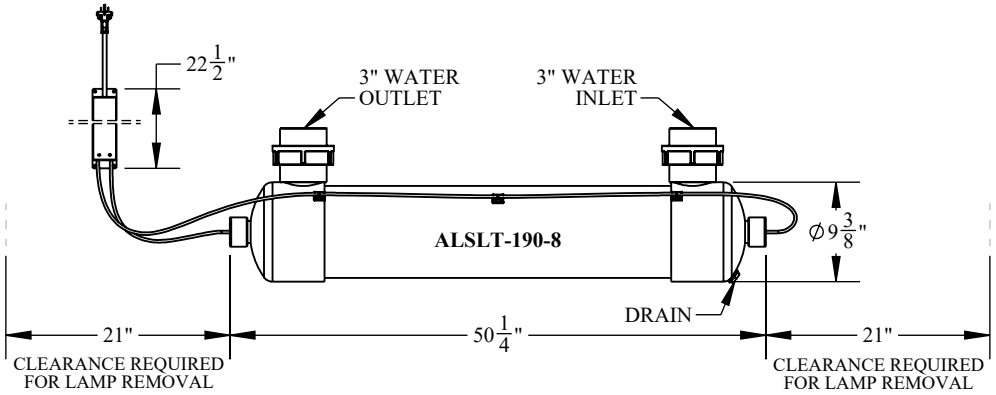

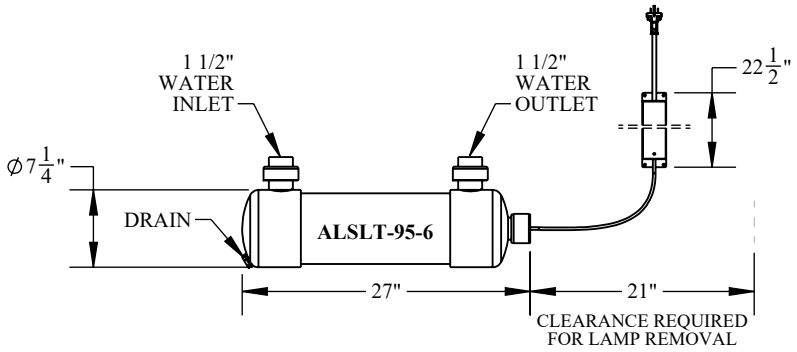

ALSLT UV STERILIZER SPECIFICATIONS										
MODEL NO.	LAMP / WATTS	VOLTS	AMPS/ WATTS	*WATER INLET / OUTLET	MAXIMUM WATER FLOW RATE (GPM) AT UV INTENSITY µWsec/cm2 @ 90% TRANSMISSIBLITY 85% AT END OF LAMP LIFE					OPTIONAL FIBERGLASS MOUNTING BRACKET PART NO.
					30K	45K	60K	90K	120K	
ALSLT-95-4	1 / 95	115	.9 / 104	1-1/2" FPT	25	17	13	8	6	UV-MB-4
ALSLT-95-6	1 / 95	115	.9 / 104	1-1/2" UNION	35	23	18	12	9	UV-MB-6
ALSLT-190-6	2 / 190	115	1.8 / 207	2" UNION	70	46	36	24	18	UV-MB-6
ALSLT-190-8	2 / 190	115	1.8 / 207	3" UNION	110	73	55	36	28	UV-MB-8

NOTE:
· SHADED AREAS HAVE WATER VELOCITIES GREATER THAN 5FT / SEC.
*ALL DIMENSIONS ARE APPROXIMATE AND CAN CHANGE AT ANY TIME.
· MAXIMUM WORKING PRESSURE FOR ALL UNITS IS 35 PSI.

OPTIONAL:
FIBERGLASS MOUNTING BRACKET (SEE TABLE FOR PART NUMBER).

REPLACE UV LAMP EVERY 11 MONTHS
REPLACEMENT UV LAMP PART#: UV-BULB-095W-1

aqua LOGIC
Aquatic Design, Manufacturing & Integration
2806 Gray Fox Rd.
Monroe, NC 28110

* COPYRIGHT *
These drawings including design idea and construction techniques herin are the sole property of Aqua Logic Inc. They shall not be revised, copied, or reproduced in any manner without the written consent of Aqua Logic Inc..

DRAWING #	SHEET TITLE
PDF-0062	ALSLT-95 THRU 190-8 UV STERILIZERS

DESCRIPTION				
AQUA LOGIC ULTRAVIOLET STERILIZERS				
DRAWN BY	**DATE**	**REVISION**	**SCALE**	**SHEET #**
Arnaldo Guzman	2/21/2023	2/13/2025 CE		1 OF 1