
CYP SERIES SPEC SHEET

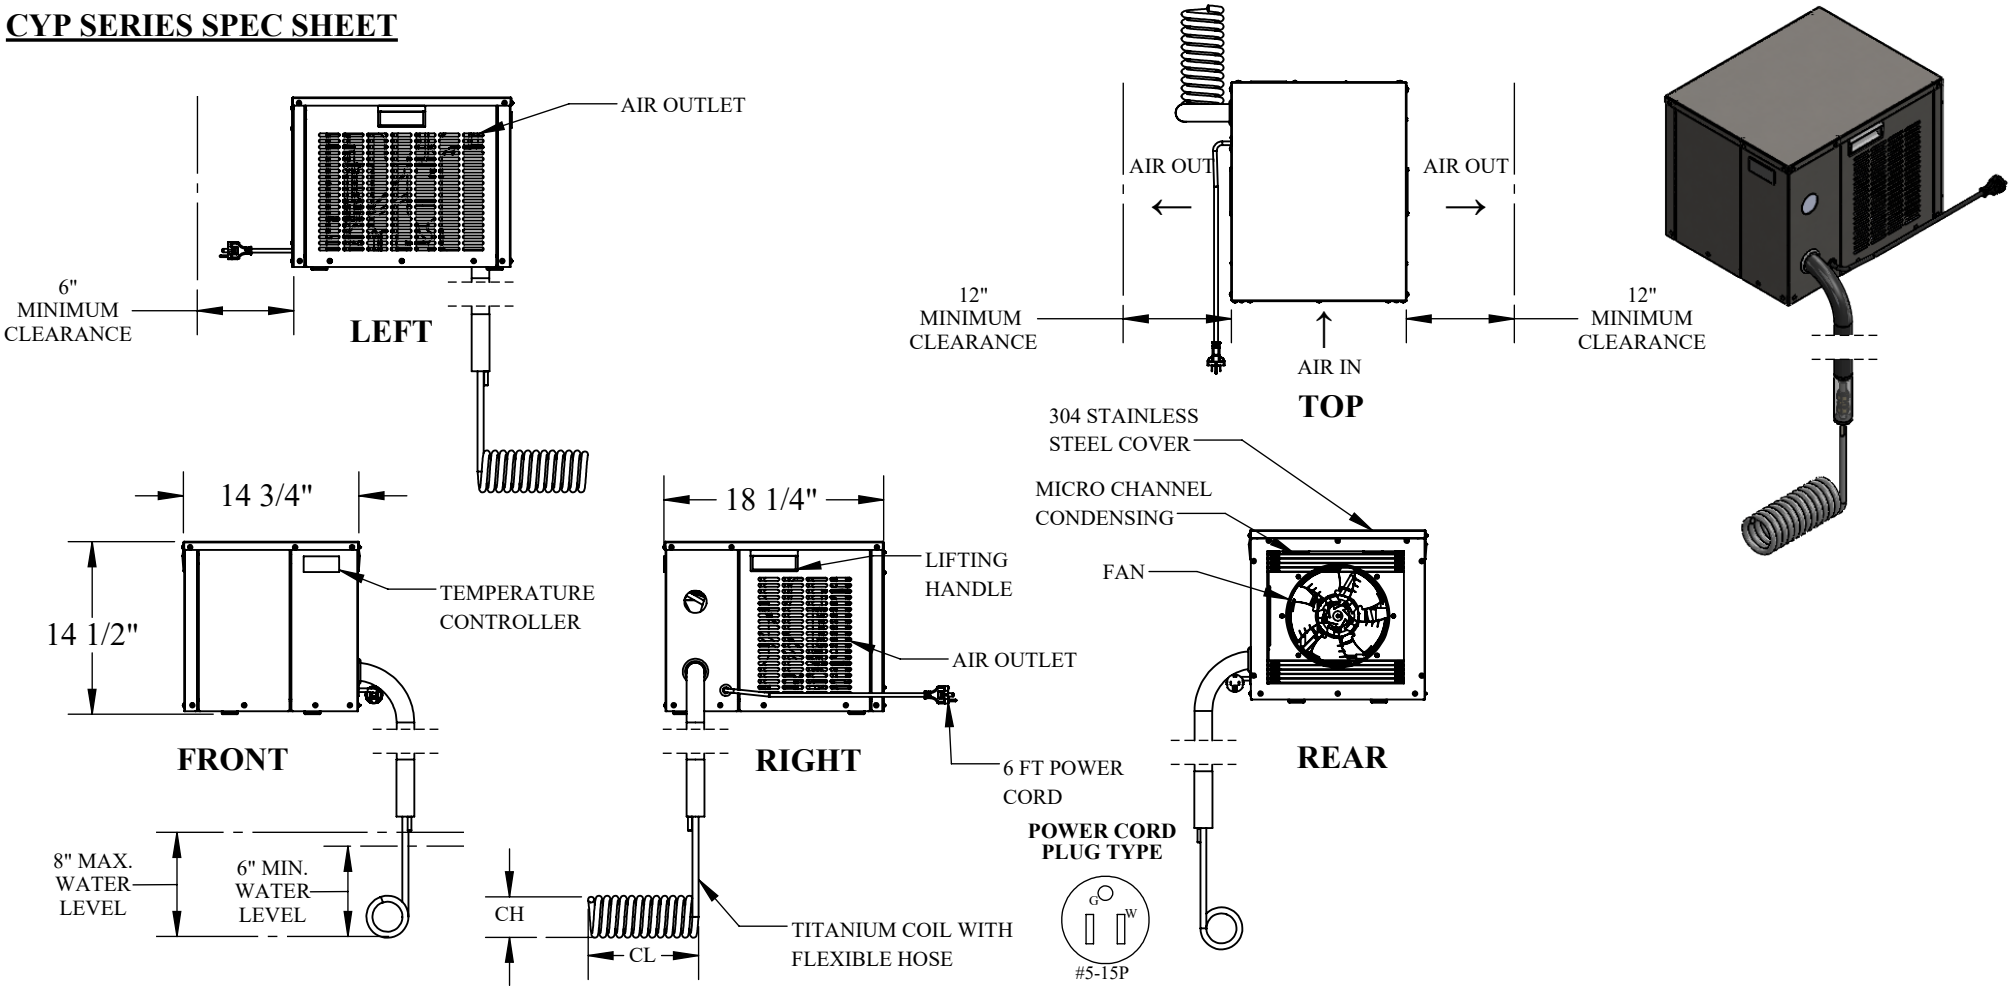

MODEL NO.	HP	NOMINAL TONS / BTUH / Kw	R-454B REFRIGERANT CHARGE (OZ.)	VOLTS / PHASE	COMP AMPS. RLA / LRA	FAN AMPS FLA	AIR OUTPUT (CFM)	WATER FLOWRATE ACROSS THE COIL MIN. / MAX. (GPM)	CL (COIL LENGTH)	CH (COIL HEIGHT)	APPROXIMATE NET WEIGHT (LBS.)	HOSE LENGTH (IN)	SHIPPING DIMENSIONS (IN)
CYP006	1/2	.5/6000/1.75	10	115/1	5.9/35	.5	380	15-25	9 1/8"	3 1/2"		72	30 1/2 X 18 1/2 X 18 1/2

*NORMAL OPERATING AMBIENT AIR TEMPERATURE: 45°F - 110°F.
*NOMINAL CAPACITIES SHOWN ARE OF REFIGERANT R-454B.

***NOTES:**
· ALL DIMENSIONS ARE APPROXIMATE AND CAN CHANGE AT ANY TIME.
· UNIT FEATURES AN INTAGRATED ELECTRONIC CONTROL, MIRCOCHANNEL HEAT EXCHANGER.
· INTEGRATED CONTROL FEATURES VOLTAGE PROTECTION, FAN FAILURE ALARM, DIRTY CONDENSER ALARM.

***IMPORTANT:**
NEVER BEND THE HOSE LESS THAN A 6 INCH RADIUS
DO NOT SUBMERGE HOSE IN WATER BEYOND THE TITANIUM RISER.

aquaLOGIC
Chillers & Titanium Heat Exchangers
2806 GRAY FOX RD, MONROE, NC 28110

* COPYRIGHT *
These drawings including design idea and construction techniques herin are the sole property of Aqua Logic Inc. They shall not be revised, copied, or reproduced in any manner without the written consent of Aqua Logic Inc..

DRAWING #	SHEET TITLE
CYP SERIES SPEC SHEET	SPEC SHEET

DESCRIPTION				
CYP SERIES CHILLER SPECIFICATION SHEET				
DRAWN BY	DATE	REVISION	SCALE	SHEET #
J. ROBINSON	7/17/2026	1.0	–	1 OF 1