
DSHP-4B AND DSHP-5B AIR-COOLED WATER HEAT PUMP SPECIFICATION


FOR INDOOR FRESH AND SALT WATER APPLICATIONS

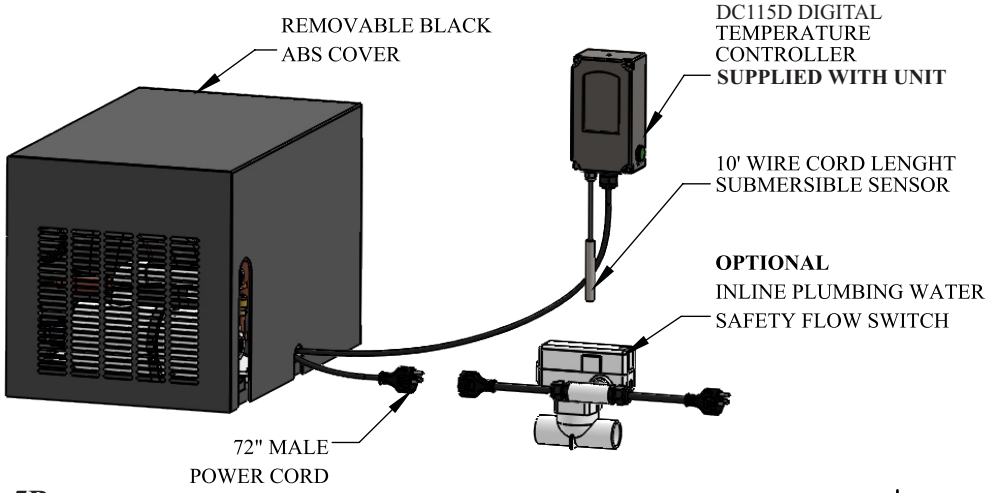


MODEL	OPTIONAL FLOW SAFETY SWITCH
DSHP-4	FS-1
DSHP-5	FS-1.5-15

NOTE:
· DO NOT OPERATE IN HEAT MODE BELOW 55°F AIR TEMPERATURE.
· ALL MODELS MUST HAVE ACCESS FOR CLEANING OF CONDENSER.
· ALL DIMENSIONS ARE APPROXIMATE AND MAY CHANGE AT ANY TIME.

DSHP-5B

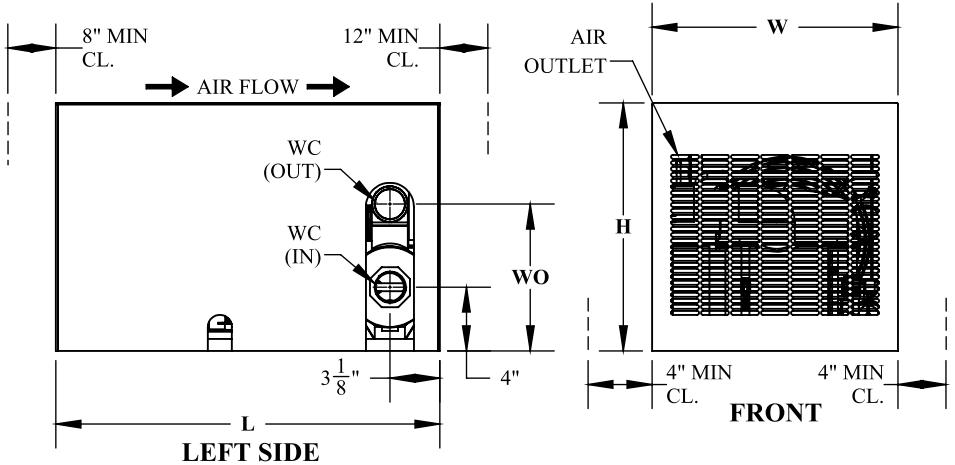

DSHP-4B

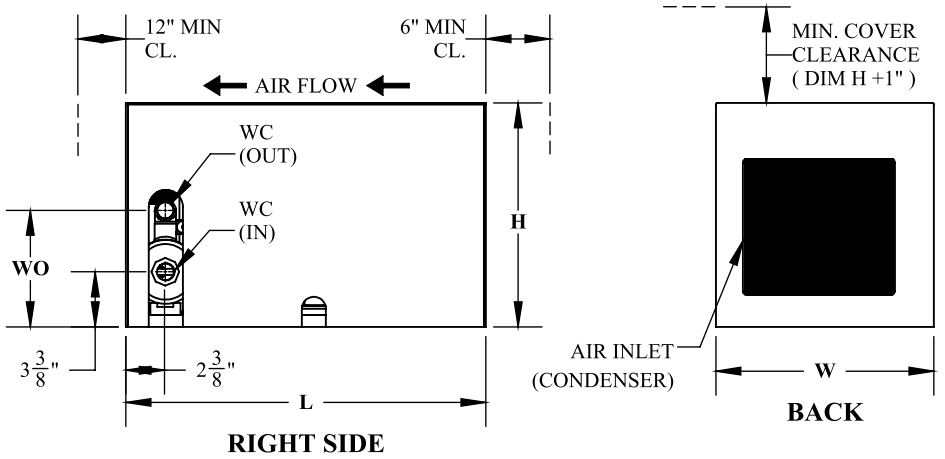


WO: WATER OUTLET **WC:** WATER CONNECTION SIZE **CL:** CLEARANCE

HEAT PUMP SPECIFICATIONS

MODEL NO.	HP	NOMINAL BTUH / kW	R513A REFRIGERANT CHARGE (OZ)	VOLTS	AMPS.	WATTS	WATER FLOW RATE (GPM)	AIR OUTLET (CFM)	L	W	H	WO	WC WATER IN / OUT (FPT)	DRY WEIGHT (LBS.)
DSHP-4B	1/3	3,500 / 1.0	8.5	115	7.2	828	10-20	260	22 1/2"	13 5/8"	14"	7 1/4"	3/4"	90
DSHP-5B	1/2	5,280 / 1.5	10	115	9.5	1092	12-25	350	24"	15 3/8"	15 1/2"	9 1/4"	1 1/2"	95

POWER CORD PLUG TYPE



#5-15P
DSHP-4 AND DSHP-5

aqua LOGIC
Chillers & Titanium Heat Exchangers
2806 Gray Fox Rd.
Monroe, NC 28110

* COPYRIGHT *
These drawings including design idea and construction techniques herin are the sole property of Aqua Logic Inc. They shall not be revised, copied, or reproduced in any manner without the written consent of Aqua Logic Inc..

DRAWING #	SHEET TITLE
	DSHP-4B AND DSHP-5B SPECIFICATIONS

DESCRIPTION					
DELTA STAR AIR COOLED HEAT PUMP					
DRAWN BY	DATE	REVISION	SCALE	SHEET #	
UPDATE CE	7/22/2025 10/9/2025	REV B	1:12	1 OF 1	