
DSHP-7B THRU 9B R-513A HEAT PUMP SPECIFICATION


FOR INDOOR FRESH AND SALT WATER APPLICATIONS

MODEL	OPTIONAL FLOW SAFETY SWITCH
DSHP-7B	FS-1.5-20
DSHP-8B	FS-1.5-230
DSHP-9B	FS-1.5-230

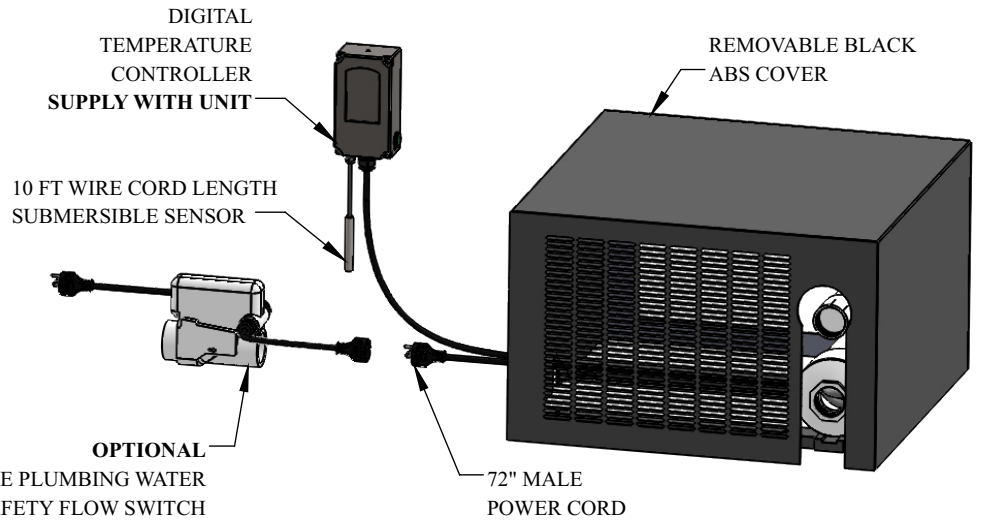

NOTE:

- DO NOT OPERATE IN HEAT MODE BELOW 55°F AIR TEMPERATURE.
- ALL MODELS MUST HAVE ACCESS FOR CLEANING CONDENSER.
- ALL DIMENSIONS ARE APPROXIMATE AND MAY CHANGE AT ANY TIME.

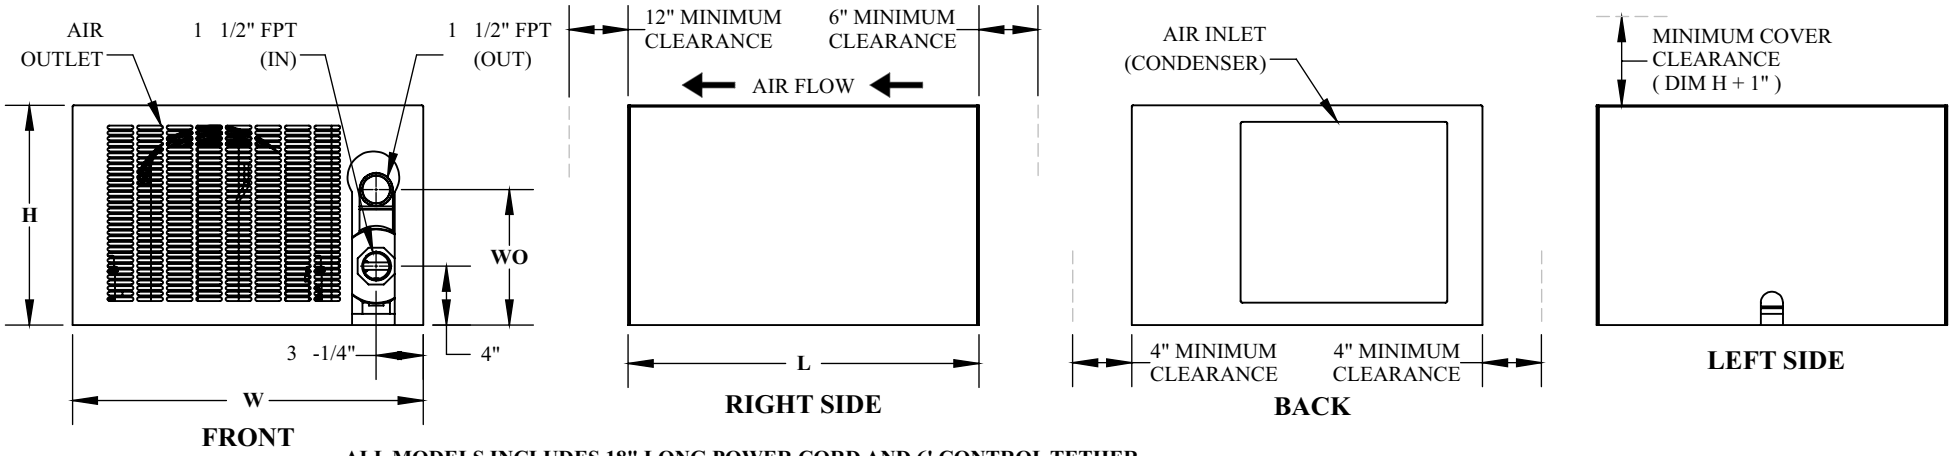


-ALL MODELS INCLUDES 18" LONG POWER CORD AND 6' CONTROL TETHER.

HEAT PUMP SPECIFICATIONS


WO: WATER OUTLET

MODEL NO.	HP	NOMINAL BTUH / kW	REFRIGERANT TYPE / CHARGE (OZ.)	WATER VOLTS / PHASE	WATTS	AMPS.	FLOW RATE (GPM)	AIR OUTLET (CFM)	L	W	H	WO	DRY WEIGHT (LBS.)
DSHP-7B	3/4	8300 / 2.4	R513A / 48	115	1495	13	15 - 30	590	23 3/4"	23 3/4"	14 7/8"	9 1/4"	120
DSHP-8B	3/4	8300 / 2.4	R513A / 48	230 / 1	1610	7	15 -30	590	23 3/4"	23 3/4"	14 7/8"	9 1/4"	120
DSHP-9B	1	10,400 / 3	R513A / 56	230 / 1	1656	7.2	20 - 35	610	26 1/4"	27 1/2"	17 5/8"	9 1/4"	165

POWER CORD PLUG TYPE



#5-20P
DSHP-7



#6-15P
DSHP-8 THRU DSHP-9

aqua LOGIC
Chillers & Titanium Heat Exchangers
2806 Gray Fox Rd.
Monroe, NC 28110

* COPYRIGHT *
These drawings including design idea and construction techniques herin are the sole property of Aqua Logic Inc. They shall not be revised, copied, or reproduced in any manner without the written consent of Aqua Logic Inc..

DESCRIPTION	DRAWING #	SHEET TITLE
DELTA STAR AIR COOLED HEAT PUMP	PDF-0103	DSHP-7 THRU DSHP-9 B SPECIFICATIONS

DRAWN BY	DATE	REVISION	SCALE	SHEET #
UPDATE 10/9/25 CE	7/16/2021	Rev B	1:15	1 OF 1