




CY-3 THRU CY-6 CHILLER SPECIFICATION

CHILLER SPECIFICATIONS															
MODEL NO.	HP	NOMINAL BTUH	R134A REFRIGERANT CHARGE (OZ.)	VOLTS / PHASE	AMPS.	WATTS	WATER FLOW RATE (GPM)	AIR OUTPUT (CFM)	L	W	H	CL (COIL LENGTH)	CH (COIL HEIGHT)	SHIPPING WEIGHT (LBS.)	SHIPPING DIMENSIONS (IN.)
CY-3	1/4	3,000	5	115	5.4	621	8-15	240	17 1/2"	13 1/2"	11 1/4"	7 1/4"	2 1/2"	53	26 x 16 x 15
CY-4	1/3	4,000	8	115	7.2	828	10-20	260	17 1/2"	13 1/2"	11 1/4"	9"	2 1/2"	62	26 x 16 x 15
CY-5	1/2	6,000	9.5	115	9.5	1092	12-25	350	17 1/2"	15 1/4"	13 1/8"	9 1/8"	3 1/2"	110	33 x 26 x 24
CY-6	1/2	6,000	9.5	230 / 1	4.8	1104	12-25	350	17 1/2"	15 1/4"	13 1/8"	9 1/8"	3 1/2"	112	33 x 26 x 24

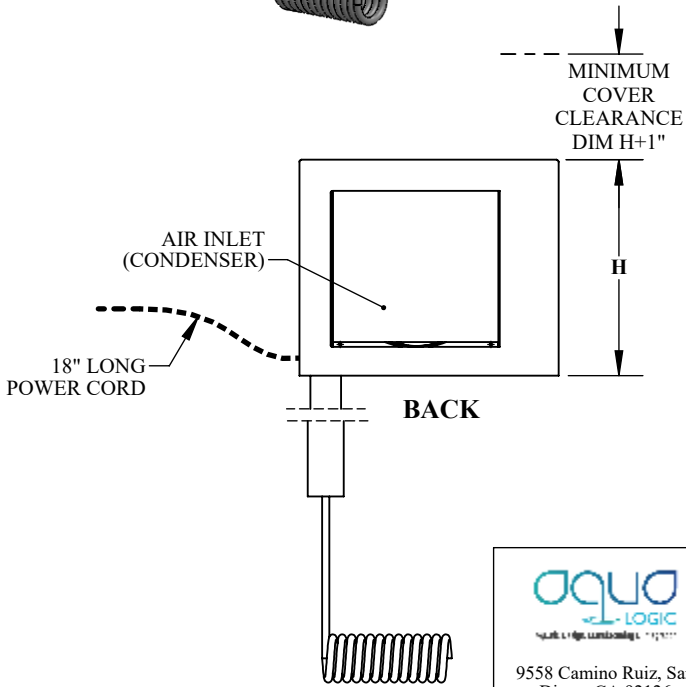

- NOTE:**
- STANDARD MODEL CHILLERS OPERATE WITHIN A TEMPERATURE RANGE OF 65-80°F.
 - ADD "CWCT" (COLD WATER CAP TUBE) TO MODEL NUMBER FOR WATER TEMPERATURES BETWEEN 50-65°F.
 - ALL DIMENSIONS ARE APPROXIMATE AND CAN CHANGE WITHOUT NOTICE.
- IMPORTANT:**
- NEVER BEND THE HOSE LESS THAN A 6 INCH RADIUS.
 - DO NOT SUBMERGE HOSE IN WATER BEYOND THE TITANIUM RISER.

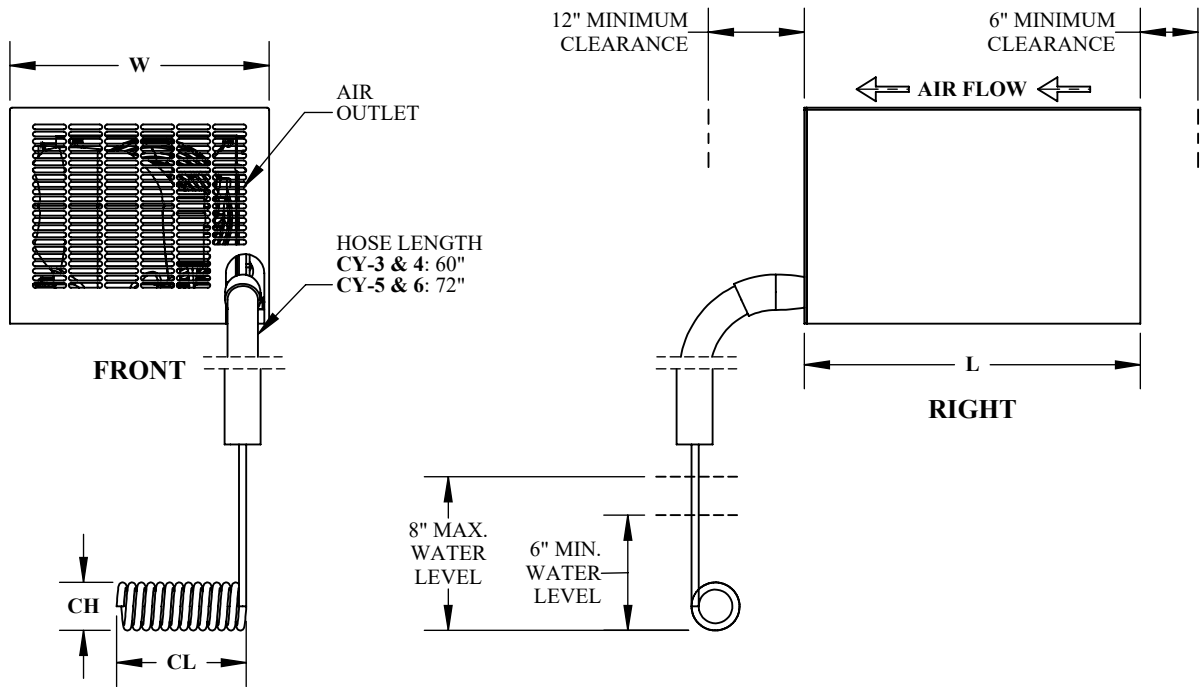

* COPYRIGHT * These drawings including design idea and construction techniques herein are the sole property of Aqua Logic Inc. They shall not be revised, copied, or reproduced in any manner without the written consent of Aqua Logic Inc.	DESCRIPTION CYCLONE AIR COOLED WATER CHILLERS		CY-3 THRU CY-6 CHILLER SPECIFICATION	
	DRAWN BY Arnaldo Guzman	DATE 9/14/2021	REVISION DANFOSS	SCALE SHEET # 1 OF 1

9558 Camino Ruiz, San Diego, CA 92126

DRAWING #	SHEET TITLE
PDF-0403	CY-3 THRU CY-6 CHILLER SPECIFICATION
DRAWN BY	DATE
Arnaldo Guzman	9/14/2021
REVISION	SCALE
DANFOSS	SHEET #
	1 OF 1